



6224

SOFT SERVE FREEZER

Two flavor, Countertop, Digital Control

Most **Compact & Versatile**
two flavor countertop model for
ice cream and frozen yogurt

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Digital control provides access to system settings and displays critical system information

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Low Operating Cost

Low energy consumption that reduces cost of operation

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Ideal for restaurants, bars, kitchens, convenience stores and kiosks to offer two flavor ice cream or gelato. Small foot print and low energy consumption help reduce operating cost.



Auto Closing Dispensing Valve

Automatically prevents product overflow after each dispense

Dispensing Speed Control

Flexible dispense rate control for different applications


Safety Protections

- Low temperature and motor overload cutouts to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



6224

SOFT SERVE FREEZER

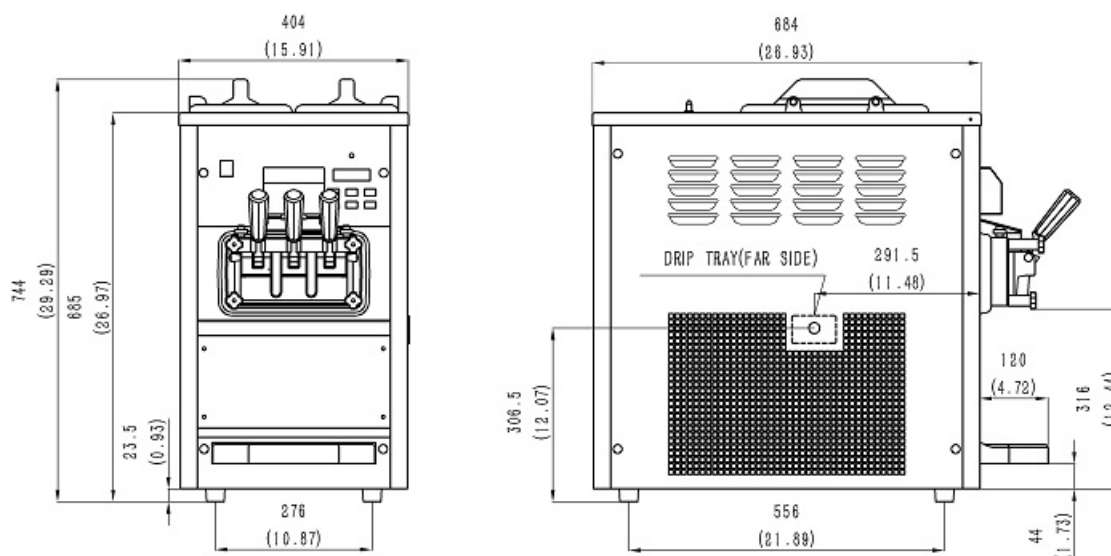

SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 1.2L / 1.3qt
Mix Hoppers	2 x 5.0L / 5.3qt
Output Capacity (80 grams)	200 serves/hr
Clearance Requirements	152mm/6" on back

Weight Kg/lb (Gravity)

Net	120 / 267
Shipping	135 / 300
Volume	0.35 CBM / 12.44 CBF

Dimensions Net (mm/in) Shipping (mm/in)

Width	404 / 15.9	450 / 17.7
Depth	684 / 26.9	870 / 34.3
Height	744 / 29.3	900 / 35.4

Electrical MFS MCA Power(kW)

220-240/50/1	15	8	2.3
110-115/60/1	20	16	2.3
208-230/60/1	15	10	2.3

• Above specifications are subject to change without notice

FEATURES

Control Systems	Single, Digital
Refrigerated Hoppers	<input checked="" type="checkbox"/>
Hopper Agitator	<input checked="" type="checkbox"/>
Temperature Display	<input checked="" type="checkbox"/>
Standby Mode	<input checked="" type="checkbox"/>
Auto Closing Dispensing Valves	<input checked="" type="checkbox"/>
Dispensing Speed Control	<input checked="" type="checkbox"/>
Low Mix Indicator Light	<input checked="" type="checkbox"/>
Low Mix Indicator Alarm	<input checked="" type="checkbox"/>
Low Temperature Protection	<input checked="" type="checkbox"/>
Motor Amperage Protection	<input checked="" type="checkbox"/>
High Pressure Protection	<input checked="" type="checkbox"/>
Thermal Overload Protection	<input checked="" type="checkbox"/>

AVAILABLE OPTIONS

Water cooled	
Top Air Discharge Chute	<input checked="" type="checkbox"/>
Spinner	
Soft Start	<input checked="" type="checkbox"/>
Custom Branding	<input checked="" type="checkbox"/>
Light Box	
Remote Auto Fill	