



6228/6228A

SOFT SERVE FREEZER

Single Flavor, Countertop, Digital Control

Powerful and Versatile

Single flavor medium capacity countertop model for ice cream, frozen yogurt and much more

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Self Closing Dispensing Valve

Automatically prevents product overflow after dispense

Dispense Speed Control

Provides flexibility in dispense rate control for different applications

Ideal for medium capacity outlets to serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options. Small footprint saves counter space.



Hopper Agitators

Maintain product consistency and prevent product separation

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight


Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



6228 / 6228A

SOFT SERVE FREEZER

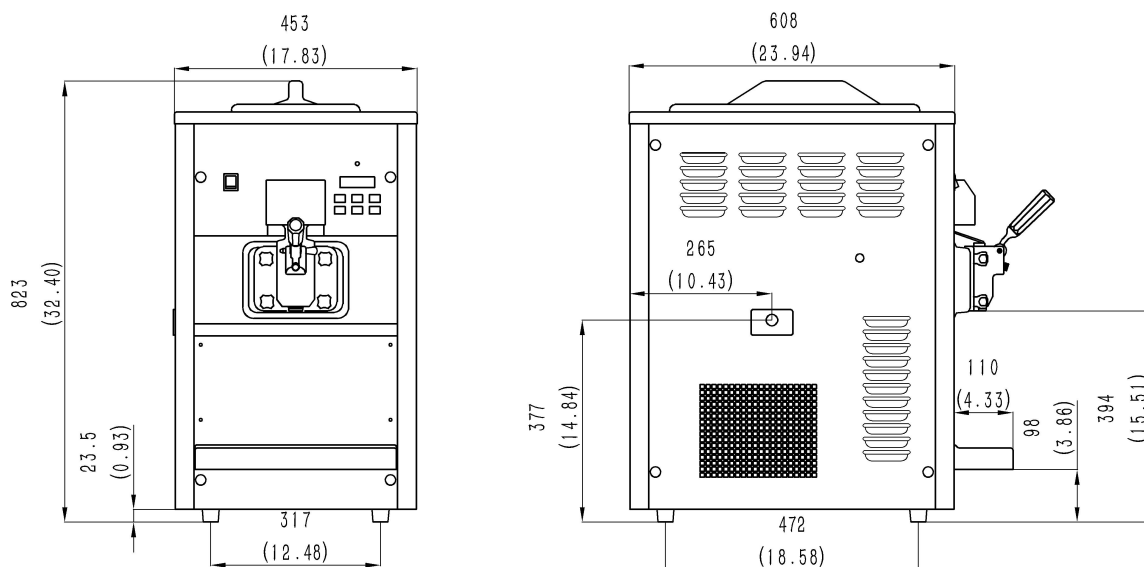

SPECIFICATIONS

Flavors	1
Freezing Cylinders	1x1.7L / 1.8qt
Mix Hoppers	1x12L / 12.7qt
Output Capacity (80 grams)	300 serves/hr
Clearance Requirements	152mm/6" on right

Weight

	Kg/lb (Gravity)	Kg/lb (Pump)
Net	110 / 244	115 / 256
Shipping	120 / 267	125 / 278

Volume	0.40 CBM / 13.98 CBF	
--------	----------------------	--

Dimensions

	Net (mm/in)	Shipping (mm/in)
Width	453 / 17.8	510 / 20.1
Depth	608 / 23.9	760 / 29.9
Height	823 / 32.4	1020 / 40.2

Width	453 / 17.8	510 / 20.1
Depth	608 / 23.9	760 / 29.9
Height	823 / 32.4	1020 / 40.2

Electrical

	MFS	MCA	Power(kW)
220-240/50/1	20	12	2.2
208-230/60/1	20	15	2.2

220-240/50/1	20	12	2.2
208-230/60/1	20	15	2.2

FEATURES

Control Systems	Single, Digital
Refrigerated Hoppers	<input checked="" type="checkbox"/>
Hopper Agitator	<input checked="" type="checkbox"/>
Temperature Display	<input checked="" type="checkbox"/>
Standby Mode	<input checked="" type="checkbox"/>
Auto Closing Dispensing Valves	<input checked="" type="checkbox"/>
Dispensing Speed Control	<input checked="" type="checkbox"/>
Low Mix Indicator Light	<input checked="" type="checkbox"/>
Low Mix Indicator Alarm	<input checked="" type="checkbox"/>
Low Temperature Protection	<input checked="" type="checkbox"/>
Motor Amperage Protection	<input checked="" type="checkbox"/>
High Pressure Protection	<input checked="" type="checkbox"/>
Thermal Overload Protection	<input checked="" type="checkbox"/>

AVAILABLE OPTIONS

Water Cooled	<input checked="" type="checkbox"/>
Top Air Discharge Chute	<input checked="" type="checkbox"/>
Spinner	<input checked="" type="checkbox"/>
Soft Start	<input checked="" type="checkbox"/>
Custom Branding	<input checked="" type="checkbox"/>

• Above specifications are subject to change without notice