



6795

FROZEN BEVERAGE FREEZER

Two flavor, Floor, Gravity feed

Powerful & Versatile

High capacity two flavor floor model for frozen beverage and milkshakes

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Simple Control, Easy Operation

Simple and intuitive control system makes operation easy and swift

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

See-through Dispensing Door

Clear dispensing door design makes product more attractive and serves as great marketing tool

Higher capacity solution with greater flexibility to serve larger crowds alcoholic & non-alcoholic frozen drinks including milkshakes



Hopper Agitators

Maintain product consistency and prevent product separation


Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

Safety Protections

- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



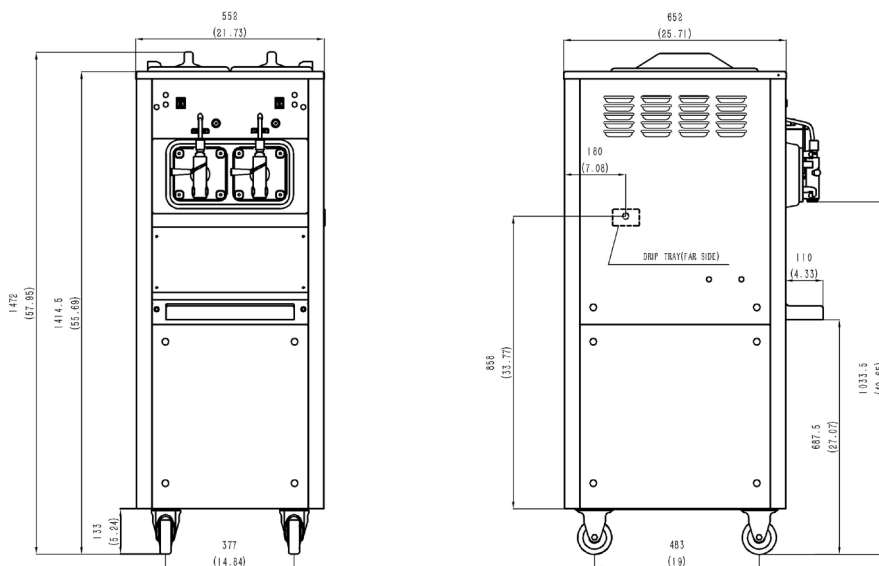

SPECIFICATIONS

| | |
|-------------------------|------------------|
| Flavors | 2 |
| Freezing Cylinders | 2 x 6.9L / 7.3qt |
| Mix Hoppers | 2 x 12L / 12.7qt |
| Output Capacity (205ml) | 480 serves/hr |
| Clearance Requirements | 152mm/6" on back |

Weight Kg/lb (Gravity)

| | |
|----------|----------------------|
| Net | 263 / 584 |
| Shipping | 293 / 651 |
| Volume | 1.22 CBM / 42.95 CBF |

Dimensions Net (mm/in) Shipping (mm/in)

| | | |
|--------|-------------|-------------|
| Width | 553 / 21.8 | 720 / 28.3 |
| Depth | 652 / 25.7 | 1030 / 40.6 |
| Height | 1470 / 57.9 | 1640 / 64.6 |

Electrical MFS MCA Power(kW)

| | | | |
|--------------|----|----|-----|
| 220-240/50/1 | 30 | 22 | 3.5 |
| 208-230/60/1 | 30 | 24 | 3.5 |

FEATURES

| | |
|-------------------------------|-------------------------------------|
| Control Systems | Two, Mechanical |
| Refrigerated Hoppers | <input checked="" type="checkbox"/> |
| Hopper Agitator | <input checked="" type="checkbox"/> |
| Temperature Display | |
| Standby Mode | <input checked="" type="checkbox"/> |
| Auto CIsing Dispensing Valves | |
| Dispensing Speed Control | |
| Low Mix Indicator Light | <input checked="" type="checkbox"/> |
| Low Mix Indicator Alarm | <input checked="" type="checkbox"/> |
| Low Temperature Protection | <input checked="" type="checkbox"/> |
| Motor Amperage Protection | <input checked="" type="checkbox"/> |
| High Pressure Protection | <input checked="" type="checkbox"/> |
| Thermal Overload Protection | <input checked="" type="checkbox"/> |

AVAILABLE OPTIONS

| | |
|-------------------------|-------------------------------------|
| Water Cooled | <input checked="" type="checkbox"/> |
| Top Air Discharge Chute | <input checked="" type="checkbox"/> |
| Spinner | <input checked="" type="checkbox"/> |
| Light Box | <input checked="" type="checkbox"/> |
| Remote Auto Fill | <input checked="" type="checkbox"/> |

• Above specifications are subject to change without notice