



6210

SOFT SERVE FREEZER

Single flavor, Countertop, Gravity feed

Most **Compact & Versatile**
single flavor countertop
model for soft serve ice cream
and frozen yogurt

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Overrun & Consistency Control

Simple and easy control of viscosity and overrun to ensure product consistency

Flexible Placement

Plugs in most available power outlets anywhere you want

Low Operating Cost

Low energy consumption that reduces cost of operation

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Ideal for any business to add ice cream, frozen yogurt, gelato or sorbet to enhance menu and dessert options. Easy addition to restaurants, bars, kitchens, convenience stores and delis.



Auto Closing Dispensing Valve

Automatically prevents product overflow after each dispense

Dispensing Speed Control

Flexible dispense rate control for different applications


Safety Protections

- Low temperature and motor overload cutouts to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



6210

SOFT SERVE FREEZER

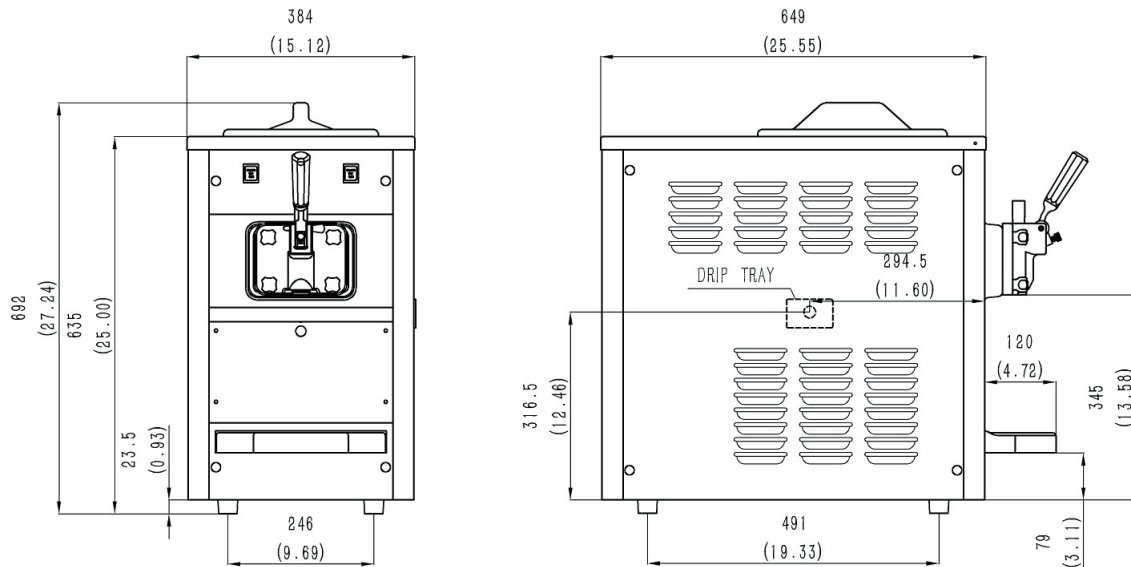

SPECIFICATIONS

Flavors	1
Freezing Cylinders	1x1.2L / 1.3qt
Mix Hoppers	1x 8.0L / 8.5qt
Output Capacity (80 grams)	120 serves/hr
Clearance Requirements	152mm/6" on back

Weight Kg/lb (Gravity)

Net	86 / 191
Shipping	96 / 213
Volume	0.30 CBM / 10.54 CBF

Dimensions Net (mm/in) Shipping (mm/in)

Width	384 / 15.1	450 / 17.7
Depth	649 / 25.6	790 / 31.1
Height	692 / 27.2	840 / 33.1

Electrical MFS MCA Power(kW)

110-115/60/1	20	16	1.2
220-240/50/1	15	10	1.5

FEATURES

Control Systems	Single, Analog
Refrigerated Hoppers	<input checked="" type="checkbox"/>
Hopper Agitator	
Temperature Display	
Standby Mode	<input checked="" type="checkbox"/>
Auto Closing Dispensing Valves	<input checked="" type="checkbox"/>
Dispensing Speed Control	<input checked="" type="checkbox"/>
Low Mix Indicator Light	<input checked="" type="checkbox"/>
Low Mix Indicator Alarm	
Low Temperature Protection	<input checked="" type="checkbox"/>
Motor Amperage Protection	<input checked="" type="checkbox"/>
High Pressure Protection	<input checked="" type="checkbox"/>
Thermal Overload Protection	<input checked="" type="checkbox"/>

AVAILABLE OPTIONS

Water Cooled	
Top Air Discharge Chute	<input checked="" type="checkbox"/>
Spinner	<input checked="" type="checkbox"/>
Soft Start	<input checked="" type="checkbox"/>
Custom Branding	<input checked="" type="checkbox"/>

• Above specifications are subject to change without notice