

6245/6245A

SOFTSERVEFREEZER

Two Flavor, Countertop, Digital Controls



Powerful and **Versatile** Two-flavor high capacity countertop model for ice cream, frozen yogurt and much more

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critial info as system status, temperatures, dispense count, errors, etc.

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Self Closing Dispensing Valve

Automatically prevents product overflow after dispense

Dispense Speed Control

Provides flexibility in dispense rate control for different applications

Ideal for any high capacity outlets to serve soft

ice cream, frozen yogurt, gelato or sorbet. Fully

loaded with all standard options.

Hopper Agitators

Maintain product consistency and prevent product separation

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating




SPACEMAN ICE SYSTEMS (HK) CO, LIMITED


FACTORY: 1 GUANZE RD, INDUSTRY PARK, DAIXI TOWN, HUZHOU, ZHEJIANG, CHINA 313023 PHONE: +86 572 3826788 FAX: +86 572 3826755 Email: info@spaceman-company.com www.spaceman-company.com



6245 / 6245A

SOFTSERVEFREEZER



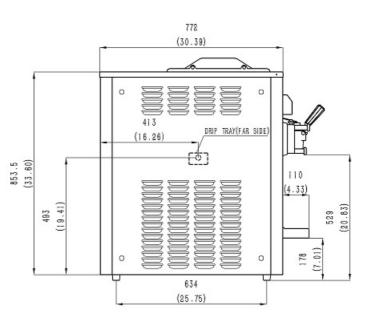

SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 1.7L / 1.8qt
Mix Hoppers	2 x 12L / 12.7qt
Output Capacity (80 grams)	550 serves/hr
Clearance Requirements	152mm/6" on back

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
Net	195/433	205 / 456
Shipping	212/471	222 / 493
Volume	0.62 CBM / 21.76 CBF	

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	552 / 21.7	620/24.4
Depth	772 / 30.4	930/36.6
Height	935/36.8	1070 / 42.1

Electrical	MFS	MCA	Power(kW)
220-240/50/1	30	24	4.0
208-230/60/1	30	26	4.0

· Above specifications are subject to change without notice

FEATURES

Control Systems	Two, Digital
Refrioerated Hoppers	
Hopper Agitator	
Temperature Display	
Standby Mode	\checkmark
Auto Clsoing Dispensing Valves	
Dispensing Speed Control	
Low Mix Indicator Light	
Low Mix Indicator Alarm	
Low Temperature Protection	
Motor Amperage Protection	
High Pressure Protection	
Thermal Overload Protection	
AVAILABLE OPTIONS	
Water cooled	\checkmark
Top Air Discharge Chute	
Spinnor	
Soft Start	
Custom Branding	
Light Box	
Remote Auto Fill	

SPACEMAN USA

224 Commerce St. Unit A1, Broomfield, CO 80020 PHONE: +01 720-328-1020 FAX: +01 720-528-8113 Email: sales@spacemanusa.com www.spacemanusa.com