

# 6268

## SOFT SERVE FREEZER

Three Flavor, Floor, Digital Controls



### Powerful & Versatile

Most compact three-flavor floor model to serve ice cream and frozen yogurt

#### Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

#### Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

#### Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

#### Self Closing Dispensing Valve

Automatically prevents product overflow after dispense

#### Dispense Speed Control

Provides flexibility in dispense rate control for different applications

Ideal for medium capacity outlets with limited floor space to serve more flavor varieties of ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options.

#### Hopper Agitator

Maintains product consistency and prevents product separation

#### Auto Programming

Allows automatic switching of operation modes based on preset schedules

#### Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

#### Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



#### SPACEMAN TECH GROUP

FACTORY: 1 GUANZE RD, INDUSTRY PARK, DAIXI TOWN,  
HUZHOU, ZHEJIANG, CHINA 313023



PHONE: +86 572 3826788 FAX: +86 572 3826755

Email: [info@spaceman-company.com](mailto:info@spaceman-company.com)

[www.spaceman-company.com](http://www.spaceman-company.com)

# 6268

## SOFT SERVE FREEZER

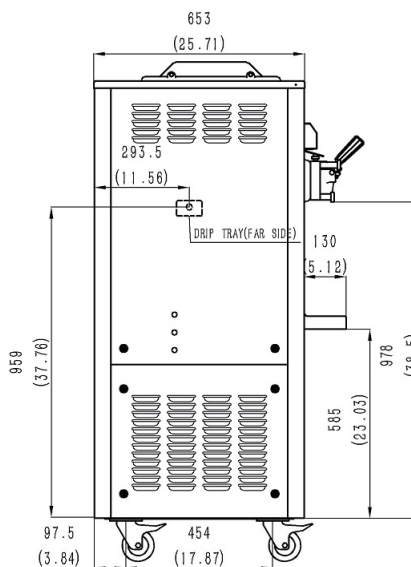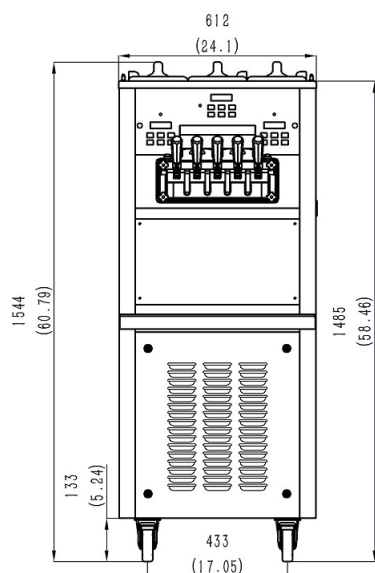

### SPECIFICATIONS

Flavors	3 + 2 Twist
Freezing Cylinders	3 x 1.7 L / 1.8 qt
Mix Hoppers	3 x 8.0 L / 8.5 qt
Output Capacity (80 g)	450 serves/hr
Clearance Requirements	152 mm/6" on back

### Weight Kg/lb

Net	234 / 516
Shipping	254 / 560

### Dimensions Net (mm/in) Shipping (mm/in)

Width	612 / 24.1	740 / 29.1
Depth	653 / 25.7	825 / 32.5
Height	1544 / 60.8	1710 / 67.3
Volume	1.04 CBM / 36.87 CBF	

Electrical	Power (kW)	Total Amps (A)	Fuse (A)
220-240/50/1	4.1	20	25
208-230/60/1	4.4	22	25

### FEATURES

Control Systems	Three, Digital
Refrigerated Hoppers	✓
Hopper Agitator	✓
Temperature Display	✓
Standby Mode	✓
Auto Closing Dispensing Valves	✓
Dispensing Speed Control	✓
Low Mix Indicator Light	✓
Low Mix Indicator Alarm	✓
Low Temperature Protection	✓
Motor Amperage Protection	✓
High Pressure Protection	✓
Thermal Overload Protection	✓

### AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓

• Above specifications are subject to change without notice