

6378B-C 6378AB-C

SOFT SERVE FREEZER

2 Flavor, Floor, Pasteurization
A: Pump Feed Model



Topping Rail
(Optional)



Most **Powerful & Versatile**
High capacity 2-flavor floor model
with **Auto-Pasteurization**
and intelligent controls

Auto-Pasteurization

Significantly reduces frequency of cleaning to every 21 days with scheduled daily auto-pasteurization

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Operation Logging

Logs every operation and error to provide history and data for easy troubleshooting

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Ideal for any restaurants, convenience stores, dessert stands and delis to serve ice cream and gelato with desire for significant reduction in labor cost of cleaning.

Hopper Agitator

Maintains product consistency and prevents product separation

Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

Refresh and Revive

Restore perfect consistency automatically to reduce product waste and labor cost while ensuring food safety


Self Closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control



6378B-C / 6378AB-C

SOFT SERVE FREEZER

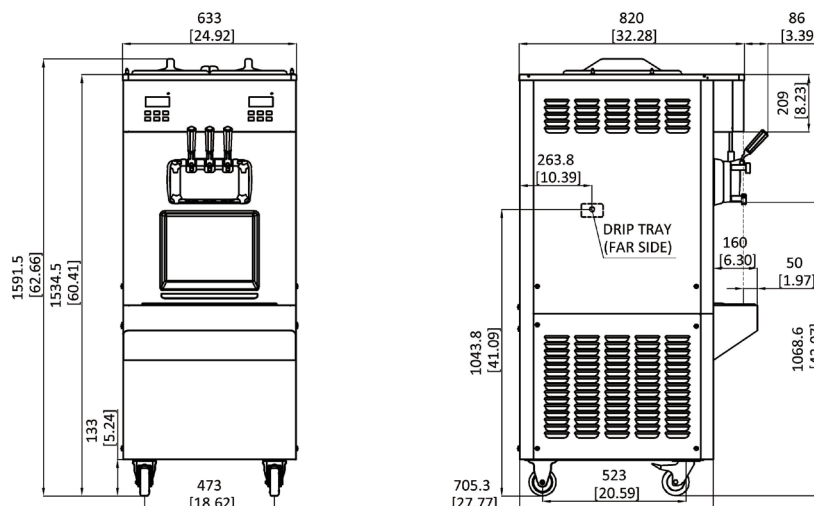

SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 3.2 L / 3.4 qt
Mix Hoppers	2 x 19 L (13 L for A)
Output Capacity (80 g)	800 serves/hr
Clearance Requirements	152 mm/6" on back

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
--------	-----------------	--------------

Net	293 / 646	313 / 690
Shipping	321 / 708	341 / 752

Dimensions	Net (mm/in)	Shipping (mm/in)
------------	-------------	------------------

Width	633 / 24.9	810 / 31.9
Depth	705 / 27.8	900 / 35.4
Height	1592 / 62.7	1810 / 71.3
Volume	1.32 CBM / 46.60 CBF	

Electrical	Power (kW)	Total Amps (A)	Fuse (A)
------------	------------	----------------	----------

380-415/50/3	6.0	17	25
208-230/60/3	6.2	24	30

FEATURES

Control Systems	Two, Digital
Refrigerated Hoppers	✓
Hopper Agitators	✓
Temperature Display	✓
Standby Mode	✓
Auto Closing Dispensing Valves	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Defrost & Refresh	✓
Soft Start	✓
Direct Drive Pump	✓
Auto-Pasteurization	✓

AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓
Topping Rail	✓

• Above specifications are subject to change without notice