

# 6210B-C 6210AB-C

## SOFTSERVEFREEZER

1 Flavor, Countertop, Pasteurization A: Pump Feed Model



Most **Compact & Versatile** single flavor counter model with **Auto-Pasteurization** 

with intelligent control

#### **Auto-Pasteurization**

Significantly reduces frequency of cleaning to every 21 days with scheduled daily auto-pasteurization

#### **Digital Control and Display**

Microprocessor control provides access to system settings and additional functions. Digital interface displays critial info as system status, temperatures, dispense count, errors, etc.

#### **Operation Logging**

Logs every operation and error to provide history and data for easy troubleshooting

#### Auto Programming

Allows automatic switching of operation modes based on preset scheduels

-----

Ideal for any restaurants, convenience stores,

dessert stands and delis to serve ice cream and

gelato but with desire for significant reduction

in labor cost of cleaning.



#### **Hopper Agitator**

Maintain product consistency and prevent product separation

#### **Defrost for Cleaning**

Increases efficiency during cleaning by heating frozen product in cylinder

#### **Direct Drive Transmission**

Eliminates consumable moving parts and increases transmission efficiency

#### **Safety Protections**

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

#### **Refresh and Revive**

Restore perfect consistency automatically to reduce product waste and labor cost while ensuring food safety

#### Self Closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control




#### **SPACEMAN INTERNATIONAL**

FACTORY: 1 GUANZE RD, INDUSTRY PARK, DAIXI TOWN, HUZHOU, ZHEJIANG, CHINA 313023 PHONE: +86 572 3826788 FAX: +86 572 3826755 Email: info@spaceman-company.com www.spaceman-company.com



## 6210B-C/6210AB-C

### SOFTSERVEFREEZER

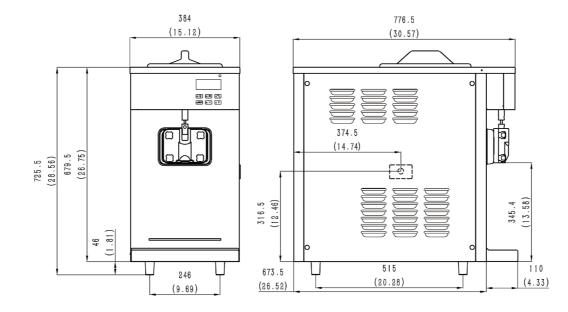

#### **SPECIFICATIONS**

Flavors	1
Freezing Cylinders	1 x 1.2L / 1.3qt
Mix Hoppers	1 x 8L (5L for A)
Output Capacity (80 grams)	200 serves/hr
Clearance Requirements	152mm/6″ on back

Weight	Kg/lb	Kg/lb (Pump)
Net	113 / 249	118 / 260
Shipping	124 / 273	129 / 284
Volume	0.35 CBM /	12.38 CBF

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	384 / 15.1	450 / 17.7
Depth	674 / 26.5	820 / 32.3
Height	726 / 28.6	950 / 37.4

Electrical	Power (kW)	Total Amps (A)	Fuse (A)
220-240/50/1	1.8	8	16
208-230/60/1	2.0	10	15

 $\boldsymbol{\cdot}$  Above specifications are subject to change without notice

#### FEATURES

Control System	Sinqle, Digital
Refrigerated Hopper	
Hopper Agitator	$\checkmark$
Temperature Display	
Standby Mode	
Auto Closing Dispensing Valve	
Dispensing Speed Control	
Low Mix Indicator Light	
Low Mix Indicator Alarm	
Low Temperature Protection	
High Pressure Protection	
Defrost & Refresh	
Soft Start	
Direct Drive Pump	
Auto-Pasteurization	

#### AVAILABLE OPTIONS

Water Cooled	
Top Air Discharge Chute	

SPACEMAN USA 525 W. 66th, Suite 105 Loveland, CO 80538

PHONE: +01 720-328-1020 FAX: +01 720-528-8113 Email: sales@spacemanusa.com www.spacemanusa.com