

# 6236-C/6236A-C

## SOFT SERVE FREEZER

Single Flavor, Countertop, Digital Control  
A: Pump Feed Model



### **Powerful** and **Versatile**

Single flavor high capacity countertop model for ice cream, frozen yogurt and much more

#### **Fast Freeze Down**

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

#### **Digital Control and Display**

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

#### **Auto Programming**

Allows automatic switching of operation modes based on preset schedules

#### **Standby**

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

#### **Hopper Agitator**

Maintains product consistency, prevents product separation

-----  
Ideal for high capacity outlets to serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options. Small footprint saves counter space.



#### **Soft System Start**

Slow motor start reduces equipment noise and stress on drive train

#### **Direct Drive Transmission**

Eliminates consumable moving parts and increases transmission efficiency

#### **Defrost for Cleaning**

Increases efficiency during cleaning by heating frozen product in cylinder

#### **Quick Refreeze**

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

#### **Self Closing Valve with Speed Control**

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control



#### **Safety Protections**

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



# 6236-C / 6236A-C

# SOFT SERVE FREEZER

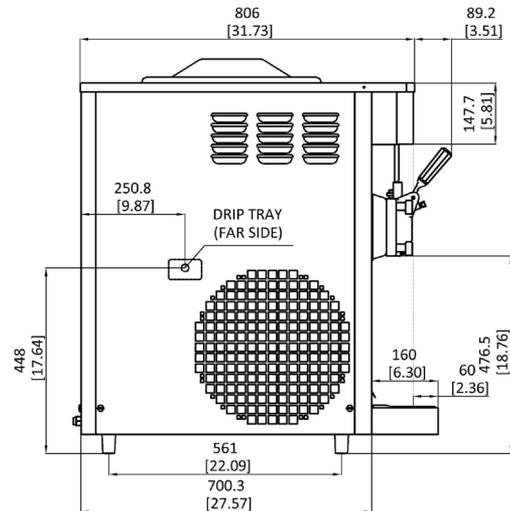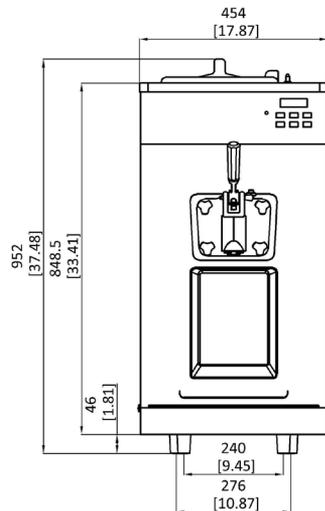

## SPECIFICATIONS

Flavors	1
Freezing Cylinders	1 x 3.2 L / 3.4 qt
Mix Hoppers	1 x 19 L (13 L for A)
Output Capacity (80 g)	400 serves/hr
Clearance Requirements	152 mm/6" on left

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
Net	126 / 278	135 / 298
Shipping	139 / 306	148 / 326

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	454 / 17.9	520 / 20.5
Depth	700 / 27.6	890 / 35.0
Height	952 / 37.5	1070 / 42.1
Volume	0.50 CBM / 17.49 CBF	

Electrical	Power (kW)	Total Amps (A)	Fuse (A)
220-240/50/1	2.5	13	16
208-230/60/1	2.8	14	20

## FEATURES

Control System	Single, Digital
Refrigerated Hopper	✓
Hopper Agitator	✓
Temperature Display	✓
Standby Mode	✓
Auto Closing Dispensing Valve	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Defrost & Quick Freeze	✓
Soft Start	✓
Direct Drive Pump (A only)	✓

## AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓

• Above specifications are subject to change without notice