

6250-C/6250A-C

SOFT SERVE FREEZER

Two Flavor, Floor, Digital Control
A: Pump Feed Model



Powerful and Versatile

Two flavor medium capacity
floor model for ice cream,
frozen yogurt and much more

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

Hopper Agitator

Maintains product consistency, prevents product separation

Ideal for medium capacity outlets to serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options.



Soft System Start

Slow motor start reduces equipment noise and stress on drive train

Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

Quick Freeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

Self-closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control





SPACEMAN TECH GROUP

FACTORY: 1 GUANZE RD, INDUSTRY PARK, DAIXI TOWN,
HUZHOU, ZHEJIANG, CHINA 313023

PHONE: +86 572 3826788 FAX: +86 572 3826755
Email: info@spaceman-company.com
www.spaceman-company.com

6250-C / 6250A-C

SOFT SERVE FREEZER

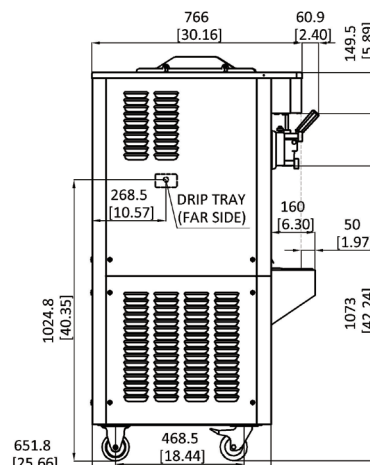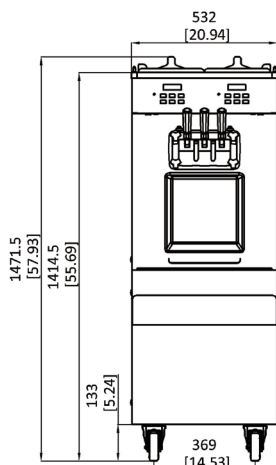

SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 1.7 L / 1.8 qt
Mix Hoppers	2 x 12 L (8 L for A)
Output Capacity (80 g)	450 serves/hr
Clearance Requirements	152 mm/6" on back

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
Net	197 / 434	213 / 470
Shipping	213 / 470	229 / 505

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	532 / 20.9	650 / 25.6
Depth	652 / 25.7	820 / 32.3
Height	1472 / 58.0	1640 / 64.6
Volume	0.87 CBM / 30.87 CBF	

Electrical	Power (kW)	Total Amps (A)	Fuse (A)
220-240/50/1	3.3	17	20
208-230/60/1	3.6	16	20

FEATURES

Control Systems	Two, Digital
Refrigerated Hoppers	✓
Hopper Agitators	✓
Temperature Displays	✓
Standby Mode	✓
Auto Closing Dispensing Valves	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Defrost & Quick Freeze	✓
Soft Start	✓
Direct Drive Pump (A only)	✓

AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓

• Above specifications are subject to change without notice