



# 6210-C / 6210A-C

## SOFT SERVE FREEZER

Single Flavor, Countertop, Digital Control  
A: Pump Feed Model

Most **Compact & Versatile**  
single flavor countertop model  
with pump feed option for soft  
ice cream & frozen yogurt

### Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

### Digital Control and Display

Digital control provides access to system settings and displays critical system information

### Auto Programming

Allows automatic switching of operation modes based on preset schedules

### Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

### Hopper Agitator (optional)

Maintain product consistency and prevent product separation

Ideal for any business with limited counter space to add ice cream, frozen yogurt, gelato or sorbet. Flexible with digital control and display. Great fit for restaurants, bars, kitchens, convenience stores and delis.



### Soft System Start

Slow motor start reduces equipment noise and stress on drive train

### Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

### Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

### Quick Freeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

### Self-closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control


### Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



# 6210-C / 6210A-C

# SOFT SERVE FREEZER

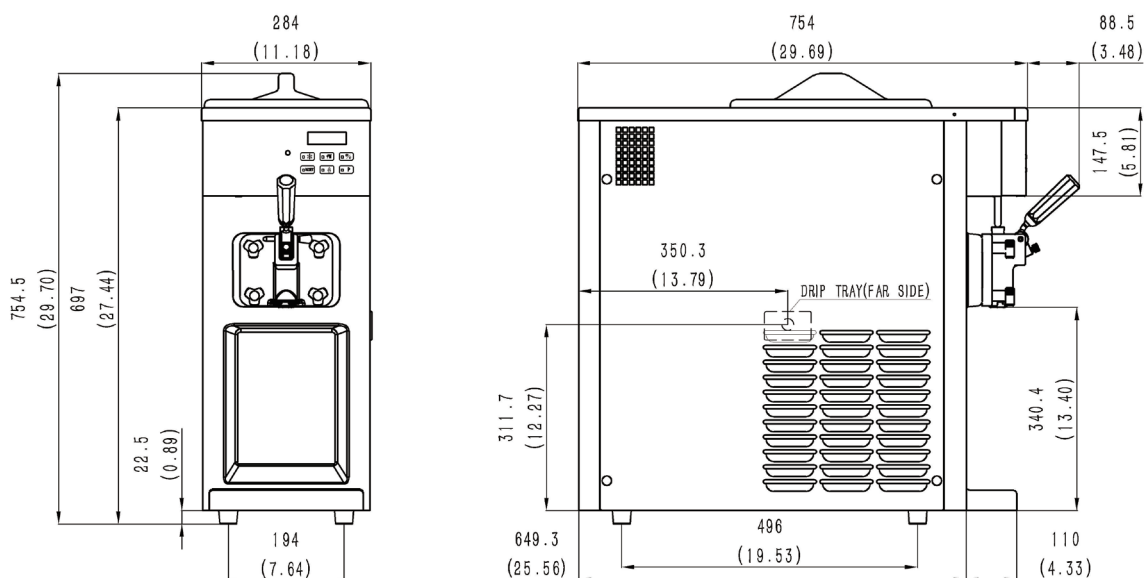

## SPECIFICATIONS

Flavors	1
Freezing Cylinders	1x1.2L / 1.3qt
Mix Hoppers	1x 8L (5L for A)
Output Capacity (80 grams)	150 serves/hr
Clearance Requirements	150mm/6" on back

## Weight

	Kg/lb (Gravity)	Kg/lb (Pump)
Net	90 / 198	100 / 220
Shipping	102 / 225	112 / 247
Volume	0.27 CBM / 9.53 CBF	

## Dimensions

	Net (mm/in)	Shipping (mm/in)
Width	284 / 11.2	380 / 15.0
Depth	649 / 25.6	800 / 31.5
Height	755 / 29.7	900 / 35.4

## Electrical

	MFS	MCA	Power(kW)
220-240/50/1	10	8	1.8
208-230/60/1	10	8	1.8
110-115/60/1	20	16	1.6

## FEATURES

Control System	Single, Digital
Refrigerated Hopper	<input checked="" type="checkbox"/>
Hopper Agitator (A only)	<input checked="" type="checkbox"/>
Temperature Display	<input checked="" type="checkbox"/>
Standby Mode	<input checked="" type="checkbox"/>
Auto Closing Dispensing Valve	<input checked="" type="checkbox"/>
Dispensing Speed Control	<input checked="" type="checkbox"/>
Low Mix Indicator Light & Alarm	<input checked="" type="checkbox"/>
Low Temperature Protection	<input checked="" type="checkbox"/>
Motor Overload Protection	<input checked="" type="checkbox"/>
High Pressure Protection	<input checked="" type="checkbox"/>
Defrost & Quick Freeze	<input checked="" type="checkbox"/>
Soft Start (not available on 110V)	<input checked="" type="checkbox"/>
Direct Drive Pump (A only)	<input checked="" type="checkbox"/>

## AVAILABLE OPTIONS

Cart (Trolley)	<input checked="" type="checkbox"/>
----------------	-------------------------------------

• Above specifications are subject to change without notice