



# 6338-C/6338A-C

## SOFT SERVE FREEZER

Single Flavor, Floor, Digital Control  
A: Pump Feed Model

Most **Powerful** and **Versatile**  
1-flavor high capacity floor model  
for ice cream, frozen yogurt and  
much more

### Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

### Digital Control and Display

Digital control provides access to system settings and displays critical system information

### Auto Programming

Allows automatic switching of operation modes based on preset schedules

### Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

### Hopper Agitator

Maintain product consistency and prevent product separation

Ideal for high capacity outlets to serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options. Small footprint helps save floor space.



### Soft System Start

Slow motor start reduces equipment noise and stress on drive train

### Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

### Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

### Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

### Quick Freeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

### Self Closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control




### SPACEMAN INTERNATIONAL

FACTORY: 1 GUANZE RD, INDUSTRY PARK, DAIXI TOWN,  
HUZHOU, ZHEJIANG, CHINA 313023

PHONE: +86 572 3826788 FAX: +86 572 3826755  
Email: info@spaceman-company.com  
www.spaceman-company.com

# 6338-C / 6338A-C

# SOFT SERVE FREEZER

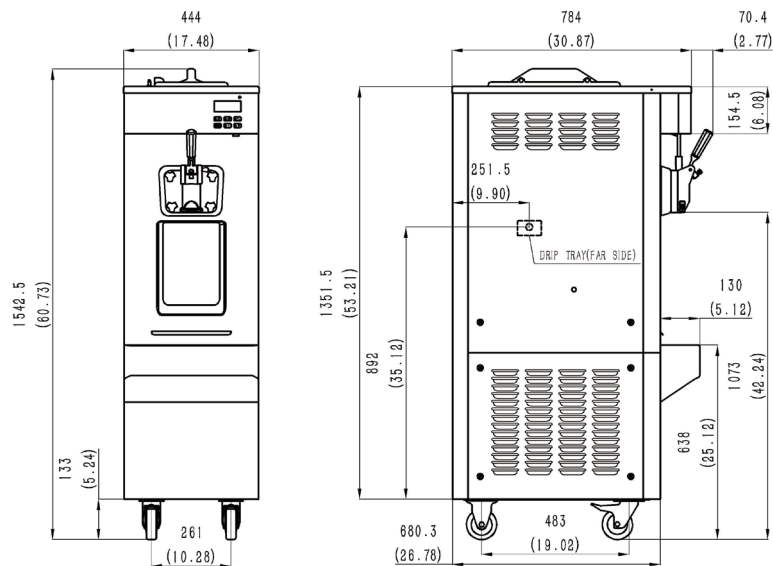

## SPECIFICATIONS

Flavors	1
Freezing Cylinders	1 x 3.2L / 3.4qt
Mix Hoppers	1 x 12L (10L for A)
Output Capacity (80 grams)	400 serves/hr
Clearance Requirements	152mm/6" on back

## Weight

	Kg/lb (Gravity)	Kg/lb (Pump)
Net	173 / 381	185 / 408
Shipping	189 / 417	200 / 441

Volume 0.75 CBM / 26.53 CBF

## Dimensions

	Net (mm/in)	Shipping (mm/in)
Width	444 / 17.5	520 / 20.5
Depth	680 / 26.8	860 / 33.9
Height	1543 / 60.7	1680 / 66.1

## Electrical

	Power (kW)	Total Amps (A)	Fuse (A)
380-415/50/3	2.6	11	20
208-230/60/3	2.8	13	25

## FEATURES

Control System	Single, Digital
Refrigerated Hopper	✓
Hopper Agitator	✓
Temperature Display	✓
Standby Mode	✓
Auto Closing Dispensing Valve	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Defrost & Quick Freeze	✓
Soft Start	✓
Direct Drive Pump (A only)	✓

## AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓

• Above specifications are subject to change without notice