

# 6450-CL

## FROZEN BEVERAGE FREEZER

Single flavor, Countertop, Gravity feed



### Most **Compact & Versatile**

Single flavor counter model for frozen beverage, smoothies and milkshakes

#### **Fast Freeze Down**

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

#### **Simple Control, Easy Operation**

Simple and intuitive control system makes operation and viscosity adjustment easy, swift and more precise

#### **Low Mix Indicator**

Light turns "ON" at low mix to alert operator to add mix

#### **See-through Dispensing Door**

Clear dispensing door design makes product more attractive and serves as great marketing tool

Perfect solution for alcoholic and non-alcoholic frozen beverages in bars and restaurants



#### **Operation Mode Indicator Light**

RGB light illuminates in various colors to indicate different modes of operations. Help identify current status of the machine for routine operation, maintenance, troubleshooting and service

#### **Self-closing Dispensing Valve**

Automatically prevents product overflow after dispense

#### **Safety Protections**

- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



#### **Light Box**

- Illuminates flavor cards to attract more business
- Easy flavor card changes and tool-free access to viscosity controls behind the panel



# 6450-CL

## FROZEN BEVERAGE FREEZER

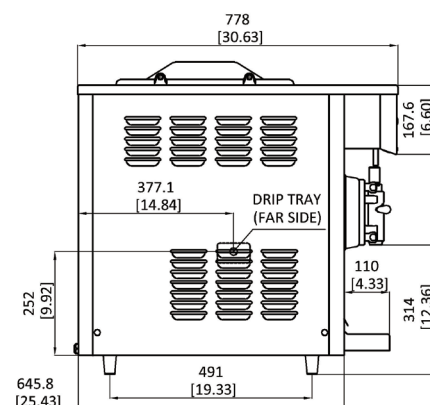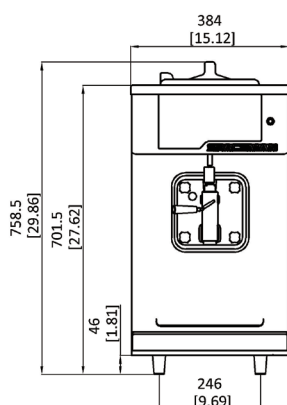

### SPECIFICATIONS

|                          |                    |
|--------------------------|--------------------|
| Flavors                  | 1                  |
| Freezing Cylinders       | 1 x 3.8 L / 4.0 qt |
| Mix Hoppers              | 1 x 12 L / 12.7 qt |
| Output Capacity (250 ml) | 80 serves/hr       |
| Clearance Requirements   | 152 mm/6" on back  |

### Weight Kg/lb

|          |           |
|----------|-----------|
| Net      | 95 / 209  |
| Shipping | 105 / 231 |

### Dimensions Net (mm/in) Shipping (mm/in)

|        |                      |            |
|--------|----------------------|------------|
| Width  | 384 / 15.1           | 430 / 16.9 |
| Depth  | 647 / 25.5           | 850 / 33.5 |
| Height | 759 / 29.9           | 910 / 35.8 |
| Volume | 0.33 CBM / 11.75 CBF |            |

### Electrical Power (kW) Total Amps (A) Fuse (A)

|              |     |   |    |
|--------------|-----|---|----|
| 220-240/50/1 | 1.6 | 7 | 10 |
| 208-230/60/1 | 1.6 | 8 | 13 |

### FEATURES

|                               |                 |
|-------------------------------|-----------------|
| Control System                | One, Mechanical |
| Refrigerated Hopper           | ✓               |
| Hopper Agitator               | ✓               |
| Auto Closing Dispensing Valve | ✓               |
| Low Mix Indicator Light       | ✓               |
| Low Mix Indicator Alarm       | ✓               |
| Standby Mode                  | ✓               |
| Standby Indicator Light       | ✓               |
| High Pressure Protection      | ✓               |
| Thermal Overload Protection   | ✓               |

### AVAILABLE OPTIONS

|                         |   |
|-------------------------|---|
| Top Air Discharge Chute | ✓ |
|-------------------------|---|

• Above specifications are subject to change without notice