



6695-CL

FROZEN BEVERAGE FREEZER

Two flavor, Countertop, Gravity feed

Powerful & Versatile

High capacity two flavor counter model for frozen beverage and milkshakes

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Simple Control, Easy Operation

Simple and intuitive control system makes operation and viscosity adjustment easy, swift and more precise

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

See-through Dispensing Door

Clear dispensing door design makes product more attractive and serves as great marketing tool

Standby & Indicator

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight; Indicator lights up during Standby

Higher capacity solution with greater flexibility to serve larger crowds alcoholic & non-alcoholic frozen drinks including milkshakes



Hopper Agitator

Maintains product consistency, prevents product separation

Self-closing Dispensing Valve

Automatically prevents product overflow after dispense

Safety Protections

- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating

Light Box

- Illuminates flavor cards to attract more business
- Easy flavor card changes and tool-free access to viscosity controls behind the panel


One-hand Operated Spinner (Optional)

- Adds ability to blend and offer more varieties of treats
- Allows for multi-tasking one-hand operation that helps increase productivity and reduce serving time



6695-CL

FROZEN BEVERAGE FREEZER

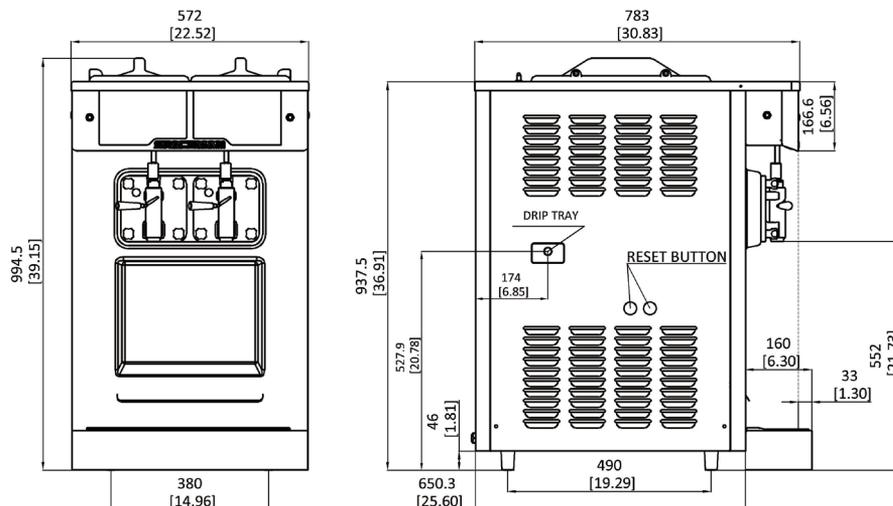

SPECIFICATIONS

Flavors	2
Freezing Cylinders	2 x 6.9 L / 7.3 qt
Mix Hoppers	2 x 12 L / 12.7 qt
Output Capacity (250 ml)	320 serves/hr
Clearance Requirements	152 mm/6" on right

Weight Kg/lb

Net	181 / 399
Shipping	199 / 439

Dimensions Net (mm/in) Shipping (mm/in)

Width	572 / 22.5	610 / 24.0
Depth	650 / 25.6	890 / 35.0
Height	995 / 39.2	1140 / 44.9
Volume	0.62 CBM / 21.86 CBF	

Electrical Power (kW) Total Amps (A) Fuse (A)

220-240/50/1	3.0	15	20
208-230/60/1	3.2	16	20

FEATURES

Control Systems	Two, Mechanical
Refrigerated Hoppers	<input checked="" type="checkbox"/>
Hopper Agitators	<input checked="" type="checkbox"/>
Auto Closing Dispensing Valves	<input checked="" type="checkbox"/>
Low Mix Indicator Light	<input checked="" type="checkbox"/>
Low Mix Indicator Alarm	<input checked="" type="checkbox"/>
Standby Mode	<input checked="" type="checkbox"/>
Standby Indicator Light	<input checked="" type="checkbox"/>
High Pressure Protection	<input checked="" type="checkbox"/>
Thermal Overload Protection	<input checked="" type="checkbox"/>

AVAILABLE OPTIONS

Top Air Discharge Chute	<input checked="" type="checkbox"/>
Spinner	<input checked="" type="checkbox"/>

• Above specifications are subject to change without notice