



# 6795-CL

## FROZEN BEVERAGE FREEZER

Two flavor, Floor, Gravity feed

### Powerful & Versatile

High capacity two flavor floor model for frozen beverage and milkshakes

#### Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

#### Simple Control, Easy Operation

Simple and intuitive control system makes operation and viscosity adjustment easy, swift and more precise

#### Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

#### See-through Dispensing Door

Clear dispensing door design makes product more attractive and serves as great marketing tool

#### Standby & Indicator

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight; Indicator lights up during Standby

Higher capacity solution with greater flexibility to serve larger crowds alcoholic & non-alcoholic frozen drinks including milkshakes



#### Hopper Agitator

Maintains product consistency and prevents product separation

#### Self-closing Dispensing Valves

Automatically prevents product overflow after dispense

#### Safety Protections

- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating

#### Light Box

- Illuminates flavor cards to attract more business
- Easy flavor card changes and tool-free access to viscosity controls behind the panel



#### One-hand Operated Spinner (Optional)

- Adds ability to blend and offer more varieties of treats
- Allows for multi-tasking one-hand operation that helps increase productivity and reduce serving time



# 6795-CL

## FROZEN BEVERAGE FREEZER

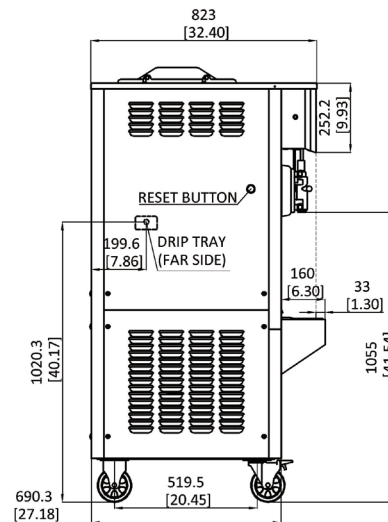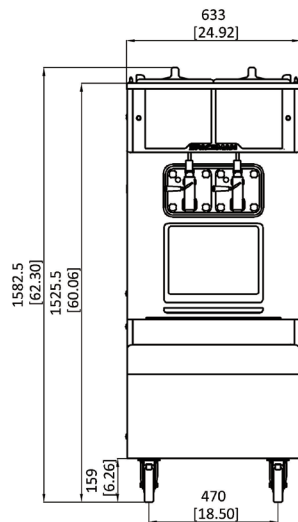

### SPECIFICATIONS

Flavors	2
Freezing Cylinders	2 x 6.9 L / 7.3 qt
Mix Hoppers	2 x 19 L / 20.0 qt
Output Capacity (250 ml)	480 serves/hr
Clearance Requirements	152 mm/6" on back

### Weight Kg/lb

Net	232 / 511
Shipping	260 / 573

### Dimensions Net (mm/in) Shipping (mm/in)

Width	633 / 24.9	810 / 31.9
Depth	690 / 27.2	900 / 35.4
Height	1583 / 62.3	1810 / 71.3
Volume	1.32 CBM / 46.60 CBF	

### Electrical Power (kW) Total Amps (A) Fuse (A)

220-240/50/1	5.1	25	35
208-230/60/1	5.4	24	30

### FEATURES

Control Systems	Two, Mechanical
Refrigerated Hoppers	<input checked="" type="checkbox"/>
Hopper Agitators	<input checked="" type="checkbox"/>
Auto Closing Dispensing Valves	<input checked="" type="checkbox"/>
Low Mix Indicator Light	<input checked="" type="checkbox"/>
Low Mix Indicator Alarm	<input checked="" type="checkbox"/>
Standby Mode	<input checked="" type="checkbox"/>
Standby Indicator Light	<input checked="" type="checkbox"/>
High Pressure Protection	<input checked="" type="checkbox"/>
Thermal Overload Protection	<input checked="" type="checkbox"/>

### AVAILABLE OPTIONS

Top Air Discharge Chute	<input checked="" type="checkbox"/>
Spinner	<input checked="" type="checkbox"/>

• Above specifications are subject to change without notice