

6218

SOFT SERVE FREEZER

Single flavor, Countertop, Gravity feed



Most **Compact & Versatile**

Classy design that offers quality and simplicity

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Overrun & Consistency Control

Simple and easy control of viscosity and overrun to ensure product consistency

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Self Closing Dispensing Valve

Automatically prevents product overflow after dispense

Dispense Speed Control

Provides flexibility in dispense rate control for different applications

Ideal for any business to add ice cream, frozen yogurt, gelato or sorbet to enhance menu and dessert options. Easy addition to restaurants, bars, kitchens, convenience stores and delis.

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



6218

SOFT SERVE FREEZER

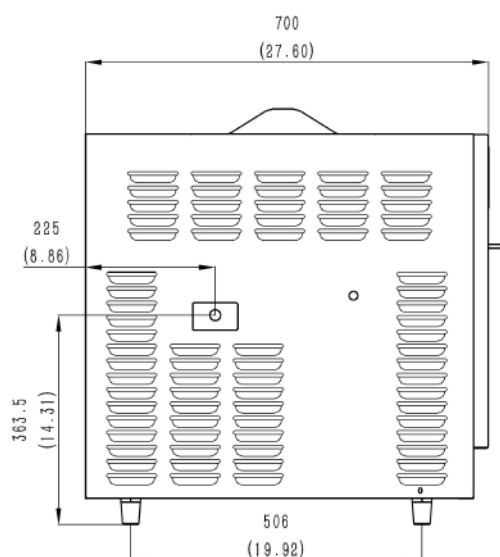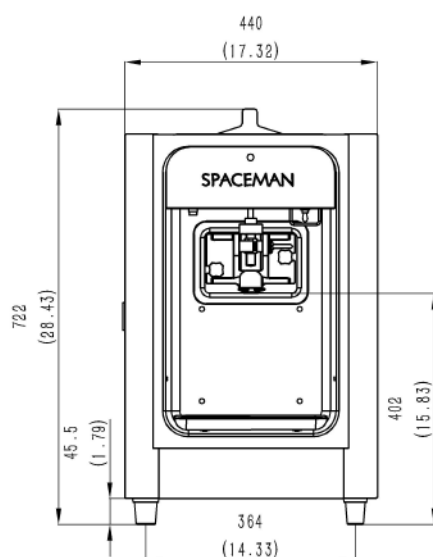

SPECIFICATIONS

Flavors	1
Freezing Cylinders	1 x 1.7L / 1.8qt
Mix Hoppers	1 x 8.0L / 8.5qt
Output Capacity (80 grams)	200 serves/hr
Clearance Requirements	152mm/6" on right

Weight Kg/lb (Gravity)

Net	101 / 225
Shipping	113 / 251
Volume	0.34 CBM / 10.14 CBF

Dimensions Net (mm/in) Shipping (mm/in)

Width	440 / 17.3	500 / 19.7
Depth	700 / 27.6	770 / 25.4
Height	722 / 28.4	890 / 35.0

Electrical MFS MCA Power(kW)

220-240/50/1	20	10	2.0
208-230/60/1	20	12	2.0

FEATURES

Control Systems	Single, Analog
Refrigerated Hoppers	✓
Hopper Agitator	
Temperature Display	
Standby Mode	✓
Auto Closing Dispensing Valves	✓
Dispensing Speed Control	
Low Mix Indicator Light	✓
Low Mix Indicator Alarm	✓
Low Temperature Protection	✓
Motor Amperage Protection	
High Pressure Protection	✓
Thermal Overload Protection	✓

AVAILABLE OPTIONS

Water Cooled	
Top Air Discharge Chute	✓
Spinner	
Soft Start	✓
Custom Branding	✓
Light Box	
Remote Auto Fill	

• Above specifications are subject to change without notice

SPACEMAN USA

224 Commerce St. Unit A1,
Broomfield, CO 80020

PHONE: +01 720-328-1020 FAX: +01 720-528-8113
Email: sales@spacemanusa.com
www.spacemanusa.com