



# 6210B-C 6210AB-C

## SOFT SERVE FREEZER

1 Flavor, Countertop, Pasteurization  
A: Pump Feed Model

Most **Compact & Versatile**  
single flavor counter model  
with **Auto-Pasteurization**  
with intelligent control

### Auto-Pasteurization

Significantly reduces frequency of cleaning to every 21 days with scheduled daily auto-pasteurization

### Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

### Operation Logging

Logs every operation and error to provide history and data for easy troubleshooting

### Auto Programming

Allows automatic switching of operation modes based on preset schedules

Ideal for any restaurants, convenience stores, dessert stands and delis to serve ice cream and gelato but with desire for significant reduction in labor cost of cleaning.



### Hopper Agitator

Maintains product consistency and prevents product separation

### Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

### Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

### Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

### Refresh and Revive

Restore perfect consistency automatically to reduce product waste and labor cost while ensuring food safety


### Self Closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control



# 6210B-C/6210AB-C

# SOFT SERVE FREEZER

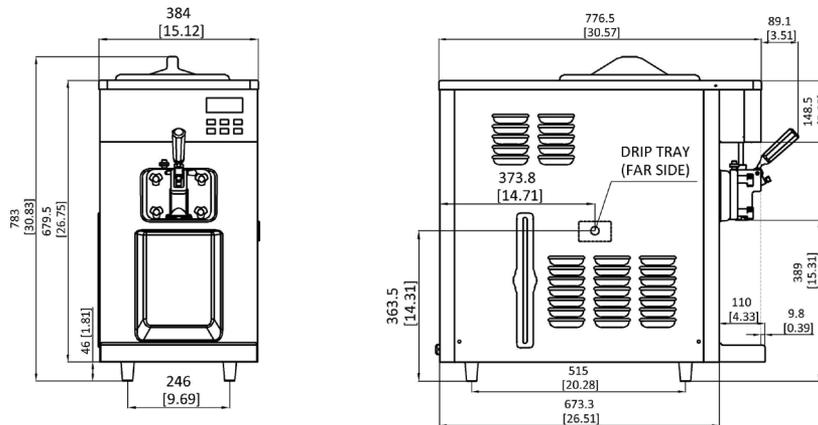

## SPECIFICATIONS

Flavors	1
Freezing Cylinders	1 x 1.2 L / 1.3 qt
Mix Hoppers	1 x 8 L (5 L for A)
Output Capacity (80 g)	200 serves/hr
Clearance Requirements	152 mm/6" on back

## Weight

	Kg/lb (Gravity)	Kg/lb (Pump)
Net	113 / 249	118 / 260
Shipping	125 / 276	130 / 287

## Dimensions

	Net (mm/in)	Shipping (mm/in)
Width	384 / 15.1	450 / 17.7
Depth	674 / 26.5	820 / 32.3
Height	783 / 30.8	950 / 37.4
Volume	0.35 CBM / 12.38 CBF	

## Electrical

	Power (kW)	Total Amps (A)	Fuse (A)
220-240/50/1	2.8	14	20
208-230/60/1	3.0	15	20

## FEATURES

Control System	Single, Digital
Refrigerated Hopper	✓
Hopper Agitator	✓
Temperature Display	✓
Standby Mode	✓
Auto Closing Dispensing Valve	✓
Dispensing Speed Control	✓
Low Mix Indicator Light	✓
Low Mix Indicator Alarm	✓
Low Temperature Protection	✓
High Pressure Protection	✓
Defrost & Refresh	✓
Soft Start	✓
Direct Drive Pump	✓
Auto-Pasteurization	✓

## AVAILABLE OPTIONS

Top Air Discharge Chute	✓
-------------------------	---

• Above specifications are subject to change without notice