

6228AB-C

SOFT SERVE FREEZER

1 Flavor, Countertop, Pump, Pasteurization



Most **Compact & Powerful** medium capacity counter model with **Auto-Pasteurization** and intelligent control

Auto-Pasteurization

Significantly reduces frequency of cleaning to every 21 days with scheduled daily auto-pasteurization

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Operation Logging

Logs every operation and error to provide history and data for easy troubleshooting

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Ideal for any restaurants, convenience stores, dessert stands and delis to serve ice cream and gelato but with desire for significant reduction in labor cost of cleaning.



Hopper Agitators

Maintain product consistency and prevent product separation

Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

Quick Refreeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period


Self Closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control



6228AB-C

SOFT SERVE FREEZER

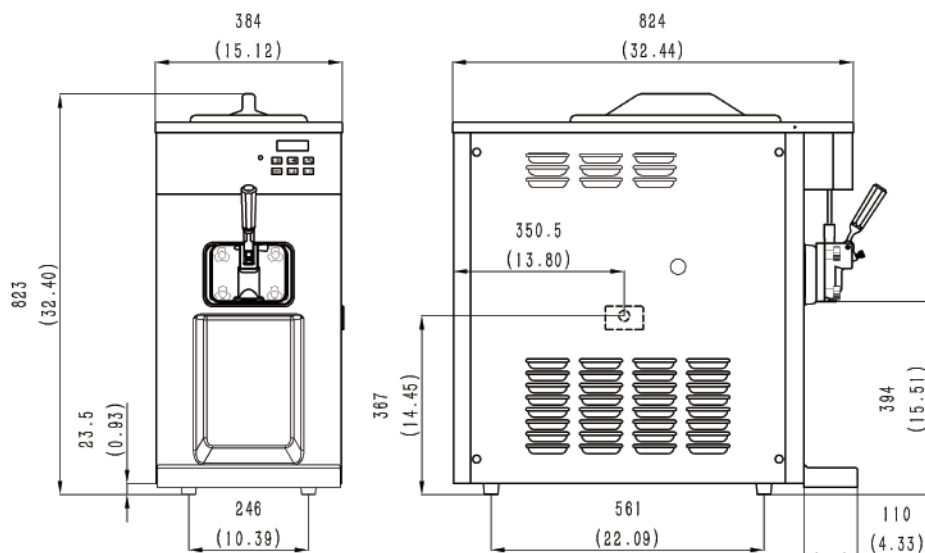

SPECIFICATIONS

Flavors	1
Freezing Cylinders	1 x 1.7L / 1.8qt
Mix Hoppers	1 x 10L / 10.6qt
Output Capacity (80 grams)	360 serves/hr
Clearance Requirements	152mm/6" on back

Weight Kg/lb

Net	124 / 276
Shipping	137 / 305
Volume	0.47 CBM / 16.62 CBF

Dimensions Net (mm/in) Shipping (mm/in)

Width	384 / 15.1	500 / 19.7
Depth	824 / 32.4	870 / 34.3
Height	823 / 32.4	1080 / 42.5

Electrical MFS MCA Power (kW)

220-240/50/1	20	16	2.3
208-230/60/1	20	18	2.3

FEATURES

Control Systems	Single, Digital
Refrigerated Hoppers	✓
Hopper Agitator	✓
Temperature Display	✓
Standby Mode	✓
Auto Closing Dispensing Valves	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Defrost & Refresh	✓
Soft Start	✓
Direct Drive Pump	✓
Auto-Pasteurization	✓

AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓
Cart (Trolley)	✓

• Above specifications are subject to change without notice

SPACEMAN USA

224 Commerce St. Unit A1,
Broomfield, CO 80020

PHONE: +01 720-328-1020 FAX: +01 720-528-8113
Email: sales@spacemanusa.com
www.spacemanusa.com